

DVI KVM Rackmount Switch

006.008.8016

1RU Rackmount KVM Switch. 16 Port DVI. 19" LCD. Cable Included

PRODUCT DESCRIPTION


The 4Cabling Rackmount DVI KVM integrates the LCD monitor, ultra-slim keyboard, and touchpad in a 1RU. The 4Cabling DVI KVM switch is a control unit that allows IT administrator to access and control multiple computers to manage the entire server room or data centre easily.

Featuring the 19" TFT LED screen the biggest in the range. The 4Cabling KVM Switch console provides front end access to compatible KVM switches utilizing space with an integrated solution that fit and slides in 1RU rackmount.



PRODUCT FEATURES

- Hotplug
- SAA approved
- Fully HDCP compliant
- 16x 1.8m KVM cable included
- Multi-platform compatibility – Windows, Linux, Mac, Unix
- 1RU height, 19" rack-mountable metal structure.
- Touchpad with two function buttons and a scroll wheel.
- 19" LED TFT monitor with 1280 x 1024 @60Hz resolution.
- Ultra slim 99 keys keyboard with a small numeric keyboard.
- Automatic locking guide rail with lock latch in the front panel
- No software required – select computers via push button, hotkey and OSD
- Controls up to 16 computers, with a maximum of 256 computers daisy chained
- User-friendly OSD human-computer interaction interface, call up OSD through keyboard and mouse hotkeys
- Broadcast mode--operations simultaneously performed on all selected computers Easily choose servers with mouse
- Complete keyboard and mouse signal simulation to ensure that the booting and switching are correct
- Auto scan feature for monitoring user-selected computers
- Support firmware upgrade
- Warranty 3-year

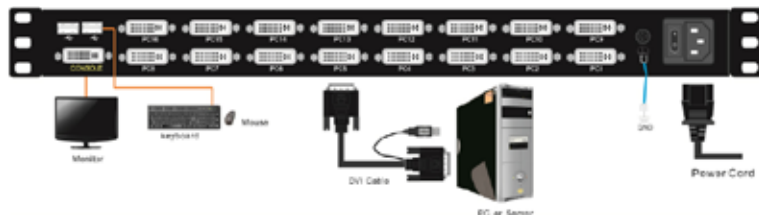

Computer connections		Direct: 16 Max: 256
Port emulation	Keyboard & Mouse	PS/2, USB
LCD monitor	LCD type	SXGA, TFT
	View area	19"
	Optimum resolution	1280 x 1024 @60Hz
	Display colour	16.7M
	Brightness	250 cd/m ² (Typ)
	Contrast ratio	1000:1 (Typ)
Mouse	Pixel pitch (mm)	H0.294 x W0.294
	X/Y resolution	>40 points/ mm
	Touchpad	Support trackball function
Keyboard		99 keys
Input power		100V-240Vac, 50~60Hz, <1.5A
Power consumption		23W
Operating temperature		0 to +40°C
Store temperature		-20 to +60°C
Humidity		0 - 80% RH, non-condensing
Weight		13.6kg
Product dimension (WxDxH)		448 x 605 x 42.5mm
Package dimension (WxDxH)		765 x 615 x 185mm
Optional power input		-36V to -72Vdc
Compatible KVM Cable		006.008.8031

