

KVM Rackmount Switch



PRODUCT DESCRIPTION

The 4Cabling Rackmount KVM integrates the LCD monitor, ultra slim keyboard, and touchpad in a 1RU. The LCD panel and keyboard/touchpad modules slide independently of each other with the drawer design which saves much space. Featuring the 19" TFT LCD screen the biggest in the range. The 4Cabling KVM Switch console provides front end access to compatible KVM switches utilizing space with an integrated solutions that fit and slides in 1RU rackmount. KVM is a control unit that allows access to multiple computers from a single KVM console. The 4Cabling KVM Switch can control up to 16 computers and can be daisy chained/array to other switches with maximum of 512 computers controlled by 1 KWM Switch.

PRODUCT FEATURES

- Dual rail structure
- Multi language support
- USB KVM cable included
- High performance touchpad
- Full size 99 keys keyboard with integrated number pad
- High resolution 19" TFT LCD monitor with up to 1280 x 1024 @60Hz
- Standard VGA connector - connect to a server or KVM switch via a standard VGA connector

KEY FEATURES

Management

Convenient computer switching via front panel LED, OSD menu and high performance trackpad. Ability to broadcast mode to simultaneously operate on all selected computers. Add or remove computers through hot pluggable without having to power down the switch.

Security



Two level password security. Only authorised users view and up to four users and one administrator with a separate profile for each.

Cascade

Direct access and control up to 16 servers or computers with single AD1916. And the ability to cascade additional KVM switches and control up to 512 servers.

Compatibility

Multi platform support compatible with Windows, Sun, Unix, and Linux. Supports server from Lenovo, Huawei, HP, IBM, Cisco and Dell, etc.

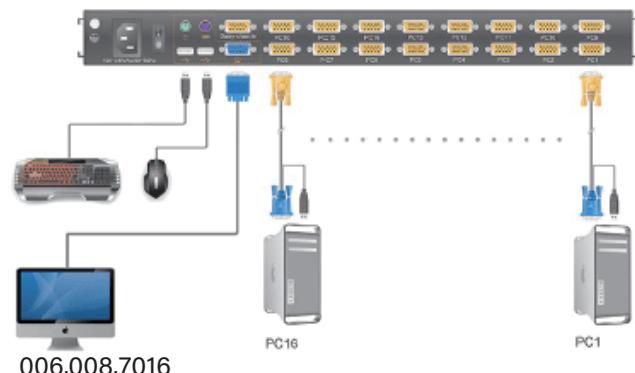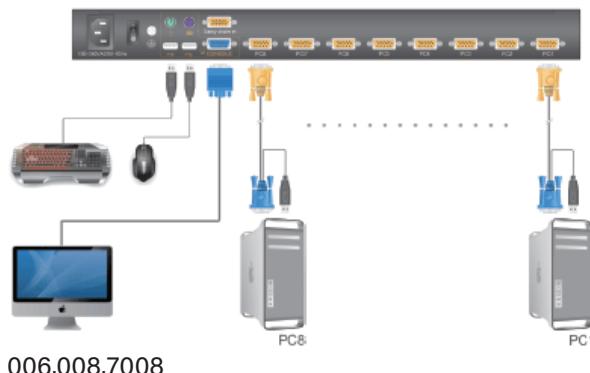

KVM Switch Rackmount



PRODUCT SPECIFICATION

Model		006.008.7008 (Switch)	006.008.7016 (Switch)	006.008.7020 (Console)
Computer connections	Direct	8	16 (DB15 female yellow)	1 (DB15 female blue)
	Max	256	512	1
Port emulation	Keyboard, mouse	PS/2, USB		
LCD monitor	LCD model	SXGA TFT		
	View area	19"		
	Optimum resolution	1280x1024 @60Hz		
	Display color	16.7M		
	Brightness	250cd/m ² (TYP)		
	Contrast ratio	1000 : 1 (TYP)		
	Pixel Pitch (mm)	0.294 (H) x 0.294 (W)		
Mouse	X/ Y resolution	>1000 points/ inch (40 points/mm)		
	Touchpad	Supports trackball function		
Keyboard		99 keys (82 keys main keyboard + 17 independent small number pad)		
Port selection		Front panel push buttons, hot keys, OSD menu		
Input power		100V~240Vac, 50-60Hz, <1.5A		
Power consumption	21W	19.8W	17W	
Operationg temperature		0-40°C		
Store temperature		-20-60°C		
Humidity		0-80% RH, non condensing		
Net weight	13.5 kg	14 kg	12.2 kg	
Product dimension (WxDxH)	448mm x 605mm x 42.5mm	448mm x 605mm x 43.5mm	448mm x 505mm x 42.5mm	
Package dimension (WxDxH)		765mm x 615mm x 185mm		
Optional power input		-36V - -72V DC		
Included 1.8M KVM cable	8	16	1	



GITC APPROVED



Powering business potential

