

## Product Specification Sheet

### CAT.5e UTP PVC PATCH CORD

Part #: 004.001.xxxx

4Cabling's range of quality category 5e Ethernet Patch Leads are made from 100% Bare Copper. They are designed to be used in mission critical situations where data integrity is of the utmost importance. 4Cabling offers this quality range patch cords in 10 colours and lengths varying from 0.25m up to 50m\* to satisfy all your patching requirements.

#### Certifications and Compliance:

All Category 5e patch cords are wired to T568A (Australian Standard), supplied with ETL & UL Verification to ANSI/TIA/EIA-568-C.2, ISO/IEC 11801 & EN50173 International Standards. Australian Standard AS/CA 5008:2010

#### Cable Description


1	Construction Material	24AWG x 4Pair, 100% Bare Copper
2	Insulation Material	PE
3	Insulation Dia. - Outer Dia.	0.97mm ± 0.03mm
4	Twisted Pair	4 Pair
5	Cable Dia. - Outer Dia.	5.5mm ± 0.2mm
6	Jacket Material	Flame Retardant PVC - Conforms to UL94V-2
7	RJ45 Plug Specification	8P8C 50µ" U-Type 94V-2
8	Length (Includes RJ45 Plug)	Listed Length + 0-20mm

#### Wire Diagram (568A)

1	White Green
2	Green
3	White Orange
4	Blue
5	White Blue
6	Orange
7	White Brown
8	Brown

Jacket

Twisted Pair

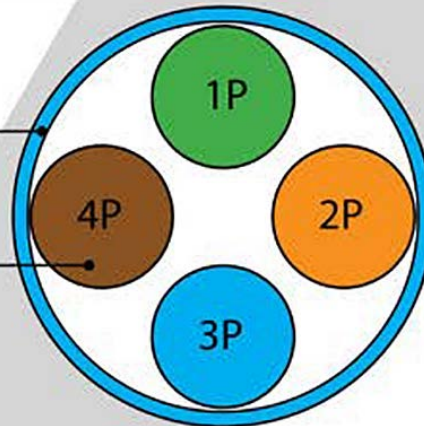

AVAILABLE COLOURS



AVAILABLE SIZES

0.25m, 0.5m, 1m, 1.5m, 2m, 3m, 5m, 10m, 15m, 20m, 30m, 50m

\*Size 15m+ Only Available in Blue Colour



Intertek



PHONE  
02 9565 4077  
Monday - Friday  
7:30 AM - 5:00 PM



FAX  
02 9565 4088  
Monday - Friday  
8:00 AM - 5:00 PM




EMAIL  
Send orders or  
questions to:  
sales@4cabling.com.au



RETAIL STORE  
31 Maddox Street  
Alexandria, NSW, 2015

## Product Specification Sheet

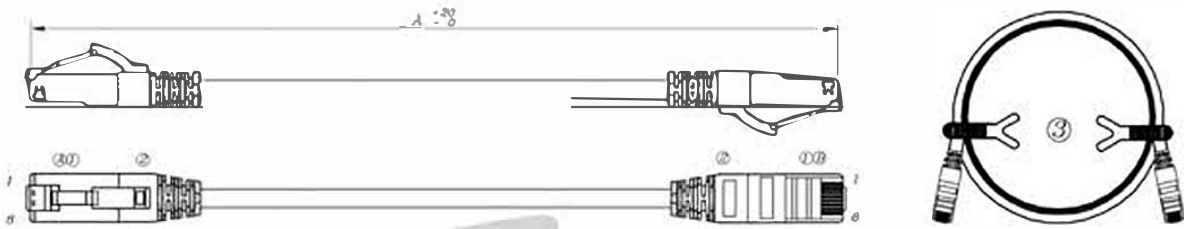

### Chemical characteristics:

No harmful substances, fully comply with EU Directive 2011/65/EU (RoHS-2)

### Electrical and Mechanical Characteristics:

Conductor Resistance	$\leq 5\Omega$
Insulation Resistance	$\geq 10M\Omega$
Insulation resistance by mated connectors, measured between terminations	$> 500M\Omega$
Insulation resistance by mated connectors	$\geq AC 1000V$
Characteristic Impedance	$100 \pm 6\Omega @ 1-100MHz$
Contact Resistance	$20M\Omega$ max.
Resistance Unbalance	2% max.
Voltage Rating	75VAC max.
Dielectric Strength	1000V/Min. minimum RMS
Ampacity	1A max.
Coupling Attenuation	40dB min. @30-100 MHz $40-20\log(f/100)$ @100-250 MHz
Transfer Impedance	N/A
Durability	$\geq 1200$ matching cycles
Cable to Plug Tensile Strength	9 Kgf (90N) min
Pulling Force	1 Kgf (10N) max
Performance Test	Component Level Compliant

### Environmental Characteristics:

Transportation and storage [°C]: -25 °C to +70 °C  
 Installation temperature [°C]: -10 °C to +50 °C  
 Operating temperature[°C]: -25 °C to +60 °C

### Fire Resistant:

Flame test: comply with IEC 60332-1-2

### Industrial standard:

- ISO/IEC 11801:2011 (Ed. 2.2)
- ANSI/TIA/EIA-568-C.2
- EN 50173-1:2011
- EN 50173-2:2007 including amendment A1:2010
- IEC 61935-2:2010 (Ed. 3.0)
- Australian Standard AS/CA S008:2010

#### PHONE

02 9565 4077  
 Monday - Friday  
 7:30 AM - 5:00 PM

#### FAX

02 9565 4088  
 Monday - Friday  
 8:00 AM - 5:00 PM

#### EMAIL

Send orders or  
 questions to:  
[sales@4cabling.com.au](mailto:sales@4cabling.com.au)

#### RETAIL STORE

31 Maddox Street  
 Alexandria, NSW, 2015

# Product Specification Sheet

Freq MHz	Insertion Loss (Max. dB) Limit (dB)	NEXT (Min. dB) Limit (dB)	RL (Min. dB) Limit (dB)	PS NEXT (Min. dB) Limit (dB)	ACR-N (Min. dB) Limit (dB)	PS ACR-N (Min. dB) Limit (dB)	ACR-F (Min. dB) Limit (dB)	PS ACR-F (Min. dB) Limit (dB)
1	3	60	17	57	57	54	57.4	54.4
4	4.5	53.5	17	50.5	49.1	46.1	45.4	42.4
8	6.3	48.6	17	45.6	42.3	39.3	39.3	36.3
10	7.1	47	17	44	39.9	36.9	37.4	34.4
16	9.1	43.6	17	40.6	34.5	31.5	33.3	30.3
20	10.2	42	17	39	31.8	28.8	31.4	28.4
25	11.4	40.3	16	37.3	28.9	25.9	29.4	26.4
31.25	12.9	38.7	15.1	35.7	25.9	22.9	27.5	24.5
62.5	18.6	33.6	12.1	30.6	15	12	21.5	18.5
100	24	30.1	10	27.1	6.1	3.1	17.4	14.4



**PHONE**  
02 9565 4077  
Monday - Friday  
7:30 AM - 5:00 PM



**FAX**  
02 9565 4088  
Monday - Friday  
8:00 AM - 5:00 PM



**EMAIL**  
Send orders or  
questions to:  
sales@4cabling.com.au



**RETAIL STORE**  
31 Maddox Street  
Alexandria, NSW, 2015