

**MULTIMODE**

**OM1**  
3mm Duplex


62.5/125µm

## OM1 MULTIMODE FIBRE OPTIC PATCH LEADS

4Cabling's OM1 Multimode Fibre Optic Patch Leads provide connection for high speed and legacy networks like Gigabit Ethernet, Fast Ethernet and Ethernet and are immune to EMI/RFI. They are mainly used on patch panels for the connection between outlets and terminal equipment. Our multimode optical fibre cables are manufactured using LSZH cable which conforms to IEC, EIA TIA and Telecordia standards.

### FEATURES

- OM1, OM3, OM4 & OS1 fibre patch leads conform to ITU-651, TIA/EIA492AAAD
- Individually labelled for lead tracing
- Low smoke zero halogen (LSZH) cable
- Manufactured with stringent quality control
- All leads are supplied with a factory test report
- Duplex configurable assemblies for LC, SC, ST & SC/A, as well as MTRJ Patch leads
- All ends are polished and individually inspected for correct polishing
- Supports high speed multi-channel data, voice & video applications

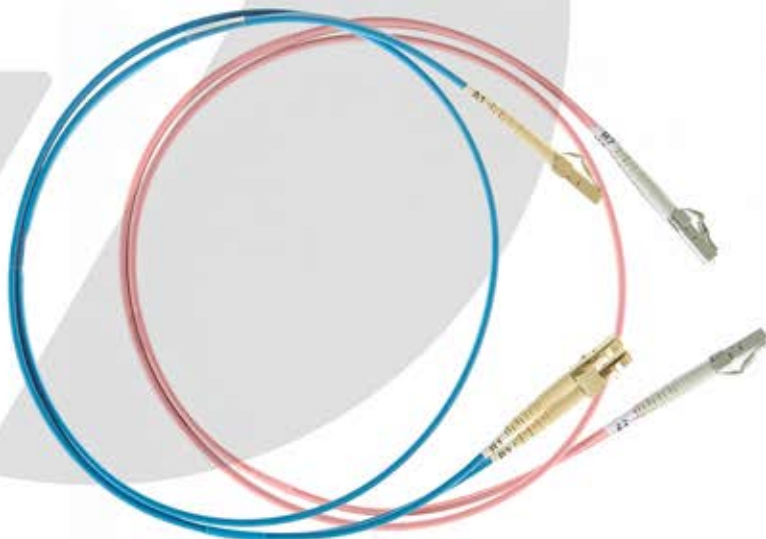

AVAILABLE COLOURS: Salmon Pink, Blue & Orange

### SPECIFICATION:

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.25dB	IEC 61300-3-4
Ave/Master	0.15dB	IEC 61300-3-4
Ave/Random	0.20dB	IEC 61300-3-34

### CONNECTOR SPECIFICATION

CHARACTERISTICS	SIMPLEX	DUPLEX
Cable Material	LSZH	LSZH
Strength Member	Aramid	Aramid
Crush (N)	1000	1000
Operating Temperature (°C)	-20 to 60	-20 to 60
Fire Specification	IEC 60332-1	IEC 60332-1

### FIBRE SPECIFICATION

CHARACTERISTICS	
Attenuation (dB) / km	2.8 @ 850nm / 0.8 @ 1310nm
Bandwidth OFL (MHz x km)	1500 @ 850nm / 500 @ 1310nm
Bandwidth LEMB (MHz X km)	2000 @ 850nm